

SERIES 1050 VINYL SIDE-LOAD SINGLE HUNG WINDOW


- Removable bottom sash
- Industry leading .01 cfm/ft. air infiltration performance
- Multi-cavity vinyl lineals improve thermal performance and enhanced sound absorbency
- Insulating glass provides energy saving thermal efficiency
- Fusion welded frame and sash minimizes air and water infiltration and enhances overall durability
- Sweep lock helps provide a weather-tight seal and added security
- Block and Tackle balance system for ease of operation
- Removable operable sash includes full-length interlock and bottom weather reflector
- Dual screw boss, metal reinforced meeting rail provides added strength
- Custom sized to the nearest 1/8"
- Dual weather-stripping helps block air and water infiltration, keeping harsh elements outside and energy saving comfort inside
- Versatile half-screen* installed from the inside or outside
- Sloped sill reduces air infiltration and accommodates easy water run-off
- Built-in accessory channels accommodate multiple installation options
- Transferable, limited lifetime warranty
- DP Rating R50 (window size tested 36" x 96")
- Jamb depth: 2.625"



Options

CUSTOM

- **Low-E Glass**
- **Low-E Glass + Argon Gas**
- **Ultra Low-E Glass + Argon Gas**
(May be required for Energy Star rating)
- 5/8" or 3/4" flat, 5/8" or 1" contoured, 5/8" contoured valance grids available
- Factory mulling of twins, triples and architectural shapes
- Custom sizes available
- Safety latch for sash restriction (field applied)

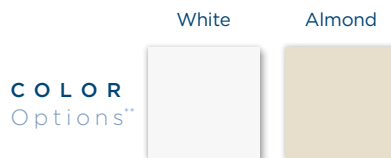

ALSO AVAILABLE

- Series 1050 Insulated Slider
- Series 1050 Insulated Picture Window
- Series 1050 Insulated Shapes



All Ellison Windows and Doors may be ordered to meet Energy Star requirements.

SCAN AND EXPERIENCE OUR WEBSITE



Note: Manufacturer reserves the right to substitute components as necessary for continued product improvement.

* Screens are not meant to restrain a child from falling through an open window.

** Printing process may affect color shown. Please refer to actual window sample when selecting colors.

