

# SERIES 150 SINGLE HUNG

- 2- and 3-lite sliders and picture windows are also available
- Insulated glass panels with optimum thermal air space featuring Warm-Edge spacer system
- Beautiful, true brick mould exterior frame perimeter
- Bottom sash operates and tilts in for easy cleaning
- Fully welded frame and sash corners
- Double sash locks come standard with all windows 27-<sup>1</sup>/<sub>4</sub>" or higher
- Sloped sill for easy water run-off
- Integrated J-Channel and nail fin simplify installation
- Series 160 available without J-Channel
- Block and tackle balance system
- Continuous head and sill on twins and triples
- Custom sizes available
- Half screen standard\*
- DP-50 Rating (window size tested 36" x 74")
- **Limited lifetime warranty**

## CUSTOM Options

- Low-E Glass
- Low-E Glass with Argon Gas
- Ultra Low-E Glass with Argon Gas
- 1-<sup>1</sup>/<sub>8</sub>" simulated divided lite (SDL) grid
- <sup>5</sup>/<sub>8</sub>" or 1" contoured, <sup>5</sup>/<sub>8</sub>" or <sup>3</sup>/<sub>4</sub>" flat, <sup>5</sup>/<sub>8</sub>" contoured valance grids
- Nine painted exterior colors (white interior only)
- Charcoal aluminum half screen\*
- Window Opening Control Device (W OCD)
- Factory mulling and factory prepared mulling
- Exterior 3-<sup>1</sup>/<sub>4</sub>" flat casing with Sill Nose DP-35 Rating (window size tested 36" x 74")
- Paintable or stainable wood jamb extensions (4-<sup>9</sup>/<sub>16</sub>" and 6-<sup>9</sup>/<sub>16</sub>" )

## COLOR Options


Vinyl



Painted Exterior



Exterior Laminate

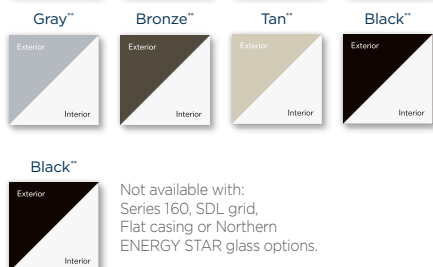

Brick Mould Exterior



Pre-punched nailing fins and integrated J-channel



3-<sup>1</sup>/<sub>4</sub>" flat casing with sill nose



ENERGY STAR compliance available in all series. Verify product specifics before ordering.

Note: Printing process may affect color shown. Manufacturer reserves the right to substitute components as necessary for continued product improvement.

\*Screens are not meant to restrain a child from falling through an open window.  
 \*\*Grid offering limited to <sup>5</sup>/<sub>8</sub>" contoured or SDL on exterior painted windows. Only use mild, water based household cleaner on painted product and rinse immediately with water. See full cleaning instructions for details.



www.ellisonwindows.com